



Standard lamps U-clip

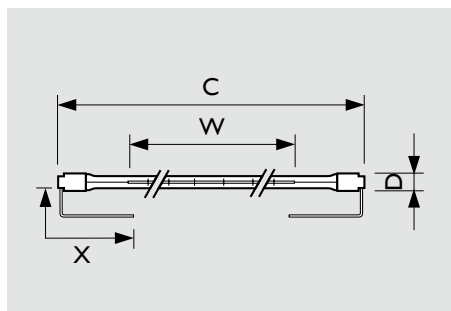

Short wave

Watt	Volt	Total length max mm (C)	Heating length mm (W)	Bulb diameter mm (D)	Tube	Colour temp. K	Average life h	Burning Position	Terminal	Wire mm (X)	PU	Type no.	Article no.
500	120	224	127	11	trans-lucent	2500	5000	horizontal	splice	146/146 not insulated	10	500T3	9245 176 36316
1000	235	346	270	11	clear	2500	5000	horizontal	splice	202/202 not insulated	10	13195U	9245 858 43916
1000	240	353	254	11	trans-lucent	2500	5000	horizontal	splice	146/146 not insulated	10	1000T3	9245 178 43816
1000	240	306	254	11	clear	2500	5000	horizontal	splice	146/146 not insulated	10	1000T3/CL	9245 179 43816
1200	144	220	155	11	clear	2400	5000	horizontal	fork	150/150 insulated	10/100	13561U	9245 859 57724
1200	144	220	155	11	with white reflector	2300	5000	horizontal	fork	150/150 insulated	1/20/100	13561U/98	9245 861 57716
1600	144	220	155	11	clear	2500	5000	horizontal	fork	150/150 insulated	10/100	13568U	9245 860 57724
1600	144	220	155	11	with white reflector	2400	5000	horizontal	fork	150/150 insulated	1/20/100	13568U/98	9245 862 57716
1600	240	503	406	11	clear	2500	5000	horizontal	splice	146/146 not insulated	10	1600T3/CL	9245 181 43816
1600	277	503	404	11	trans-lucent	2500	5000	horizontal	splice	146/146 not insulated	10	1600T3	9245 207 46916
2000	240	305	254	11	clear	2500	5000	any	splice	146/146 not insulated	10	2000T3/CL	9245 185 45516
2500	480	731	638	11	trans-lucent	2550	5000	horizontal	splice	146/146 not insulated	10	2500T3	9245 183 51616
2500	480	731	638	11	clear	2550	5000	horizontal	splice	146/146 not insulated	10	2500T3/CL	9245 264 51616
3800	575	1062	965	11	trans-lucent	2500	5000	horizontal	splice	146/146 not insulated	6	3800T3	9245 184 51116
3800	575	1062	967	11	clear	2500	5000	any	splice	146/146 not insulated	6	3800T3/CL/UB	9245 173 51116

HeLeN lamps U-clip

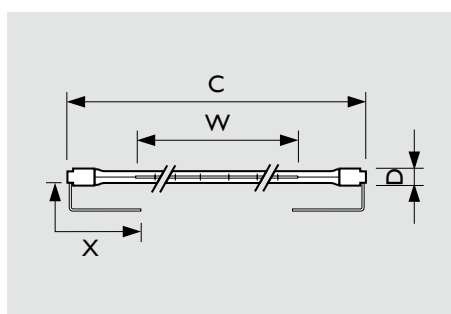

Short wave

Watt	Volt	Total length max mm (C)	Heating length mm (W)	Bulb diameter mm (D)	Tube	Colour temp. K	Average life h	Burning Position	Terminal	Wire mm (X)	PU	Type no.	Article no.
3000	235	503	423	11	HeLeN coated	NA	5000	any	splice	146/146 not insulated	10	15012U	9245 310 45524